Picosystems®

PICOPURE II FAUCET

The Picopure II® combines UV technology and ultrafiltration to dispense ASTM Type I reagent grade water with endotoxin/pyrogen levels below 0.005 EU/ml dispensed at 1.9 LPM. The faucet features a stainless steel control valve, a high-intensity 254nm UV light, an electropolished and passivated 316 stainless steel dispensing spout, and an Ultrafilter capsule that provides exceptional filtration of particulates, microorganisms, and pyrogens.

UNIT OPTIONS

PICOPURE II

PICOSYSTEM ULTRA W/ PICOPURE II

PICOMAX ULTRA W/ PICOPURE II

FEATURES

- Electropolished stainless steel spout.
- Stainless steel flow control valve
- 254nm Ultraviolet Light

PRODUCT SPECIFICATION

Dimensions: 6.5" L x 5" W x 12" H

Power: 120V / 60Hz

Spout: Electropolished 316 stainless steel

Control valve: Stainless steel

Ultraviolet Light: 30,000 mW-sec/cm2 of 254nm

Ultrafilter Capsule: 0.05 µm pore size

PERFORMANCE

Resistivity: 18 megogm-cm (25°C)

Pyrogens/Endotoxins: <0.005 EU/ml

TOC: <5 ppb

Bacteria: 0 CFU/mL (<0.1 CFU/mL with capsule postfilter)

Sodium: <1 ppb

Hardness: <0 ppb

pH: 6.8-7.0

Flow rate: 0.5 gpm (1.9 Lpm)

HYDRO THE PURE CHOICE.

Hydro Service & Supplies Inc.
1-800-950-7426
hydroservice.com

DIMENSIONS

FRONT

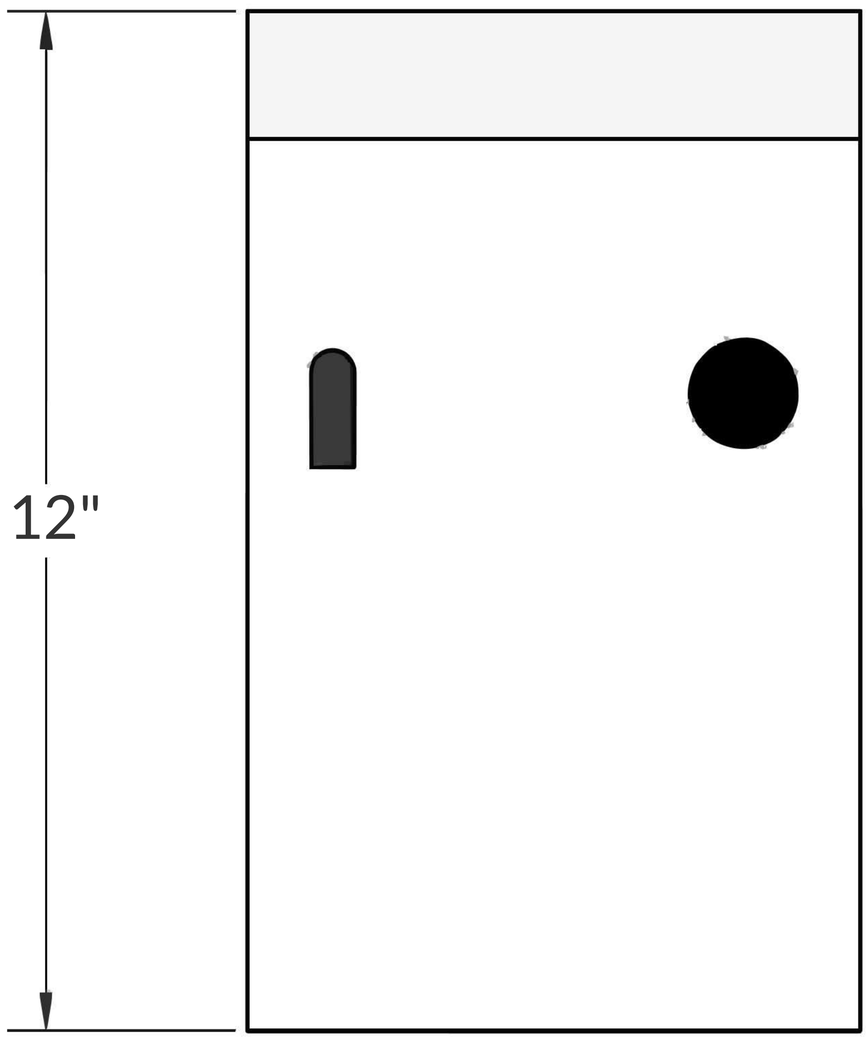
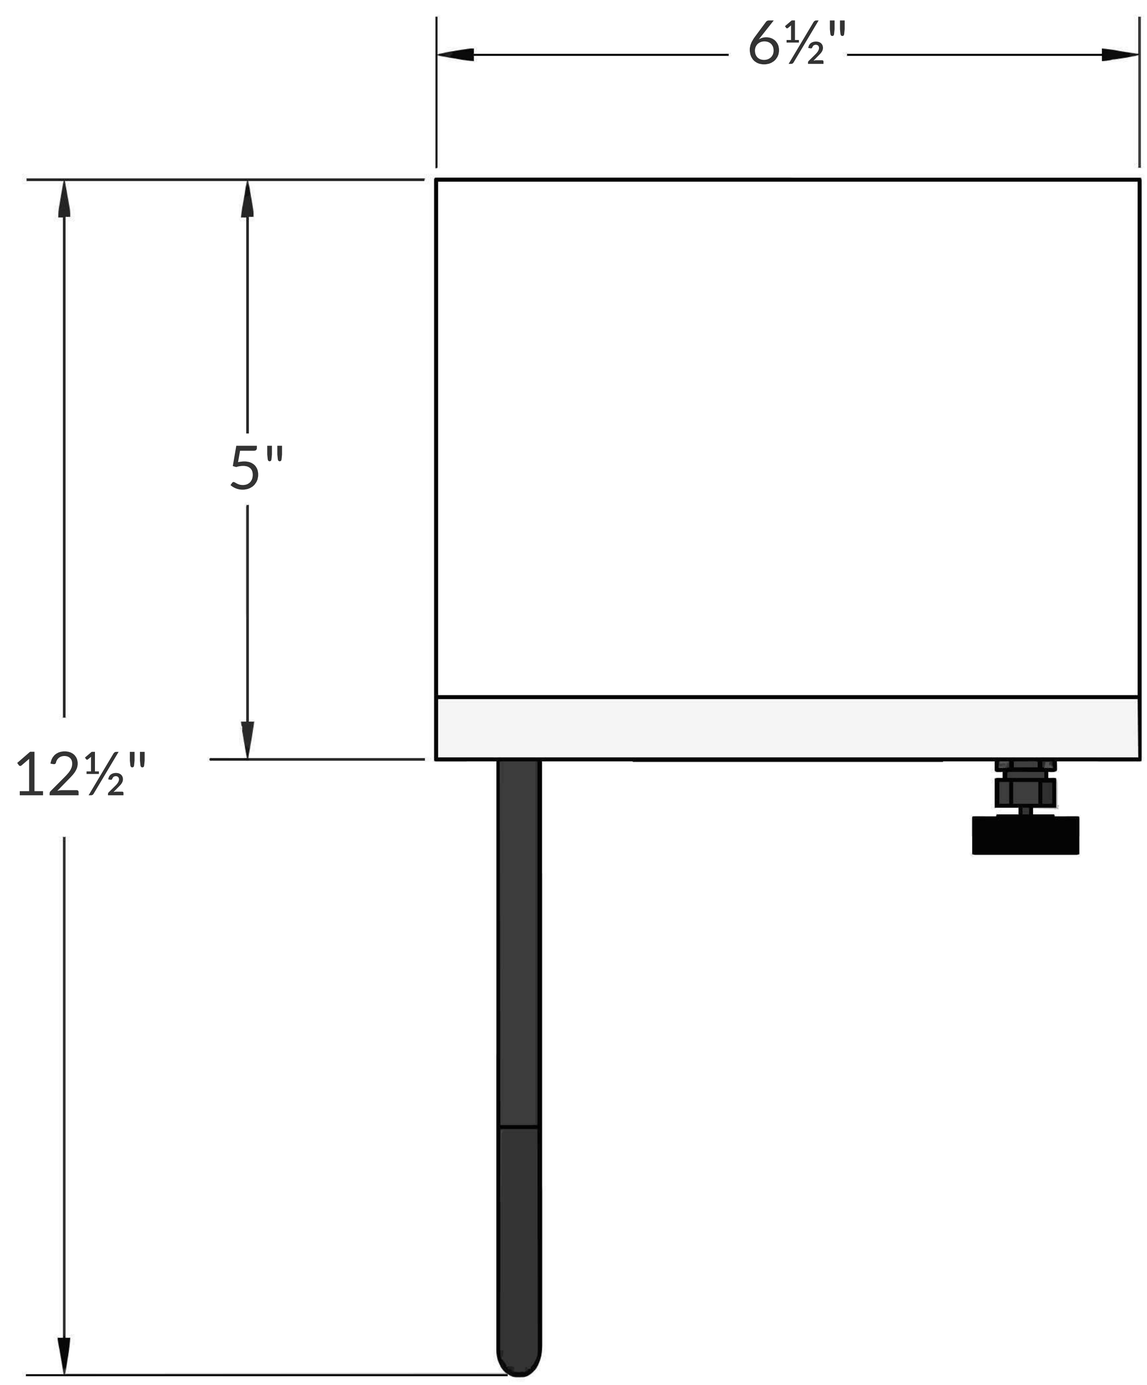
TOP