THE HYDRO PICOMAX ULTRA

Description

Picomax Ultra is a wall-mounted water system housed in a powder-coated cabinet that integrates a Picopure® faucet to polish feed water to ultrapure quality at the point of use.

General Information

Series

Pico Series

Water Quality

Produces Ultrapure ASTM Type I / CAP Type I Reagent Grade

Distribution

0.5 GPM (1.9 LPM)

Applications

Critical lab use requiring low TOC ASTM and CAP Type I Reagent Grade Water

Dimensions

30”L × 10”W × 30”H

Faucet

Picopure 2 or Picopure 3

Key Features

- Wall-mount cabinet
- Activated carbon stage for chlorine/TOC reduction
- Mixed-bed deionizers for high purity
- Integrated UV Plus Pump Station with TOC-reducing UV
- Pairs with your choice of Picopure faucet

Performance

Resistivity: 18 MΩ·cm @ 25°C
Conductivity: 0.056 µS/cm @ 25°C
TOC: < 5 ppb
Bacteria: 0 CFU/mL (Picopure)
Pyrogens/Endotoxins: < 0.005 EU/mL
Sodium: < 1 ppb
Hardness: 0 ppb
pH: 6.8–7.0

THE PURE CHOICE.
Hydro Service & Supplies Inc.
(919) 544-3744
www.hydroservice.com

Scan for More

THE HYDRO
PICOMAX ULTRA
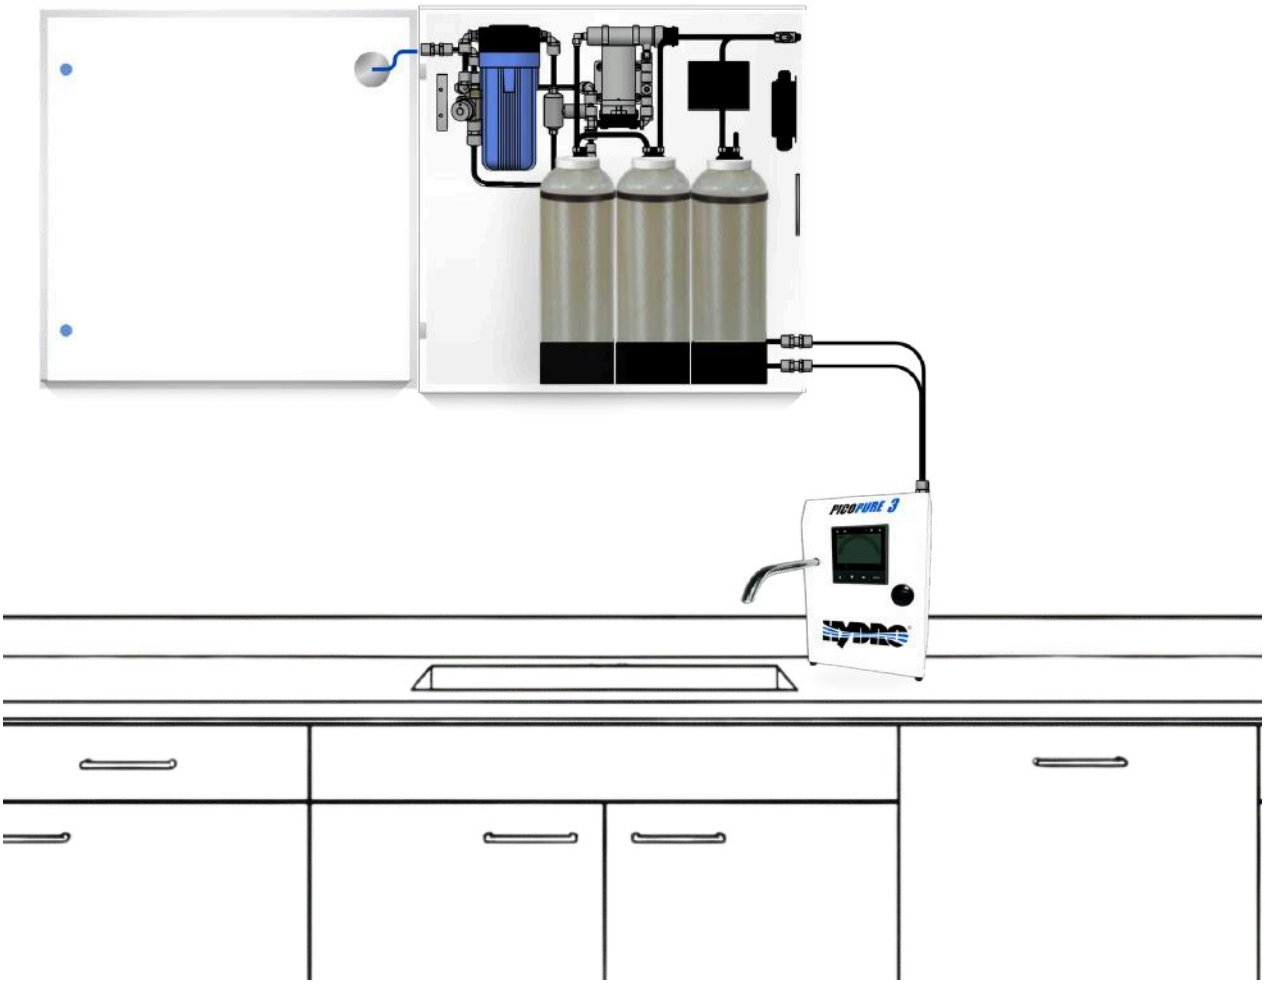
Flow Diagram