THE HYDRO PICOSYSTEM PLUS

Description

The Picosystem® Plus is an integrated point-of-use water system that combines UV circulation and multi-stage treatment to supply high-purity feed water to laboratory faucets for critical applications.

General Information

Series

Pico Series

Water Quality

Produces ASTM Type I / CAP Type I laboratory-grade water

Distribution

0.5 GPM (1.9 LPM)

Applications

General laboratories, research facilities, education, routine testing applications

Dimensions

24”L × 7”W × 23”H

Faucet

Gooseneck, Flex or Flex Rinse Combo

Key Features

- Designed for beneath-cabinet installation
- Highly activated carbon media for chlorine/chloramine removal & TOC reduction
- Pharma-grade mixed-bed DI resins
- Electropolished stainless steel spout
- Pairs with your choice of Picotap faucet

Performance

Resistivity: 18 MΩ·cm @ 25°C
Conductivity: 0.056 µS/cm @ 25°C
TOC: < 20 ppb
Bacteria: ≤ 10 CFU/mL
Sodium: < 1 ppb
Hardness: 0 ppb
pH: 6.8 – 7.0

THE PURE CHOICE.
Hydro Service & Supplies Inc.
(919) 544-3744
www.hydroservice.com

Scan for More

THE HYDRO
PICOSYSTEM PLUS

Flow Diagram

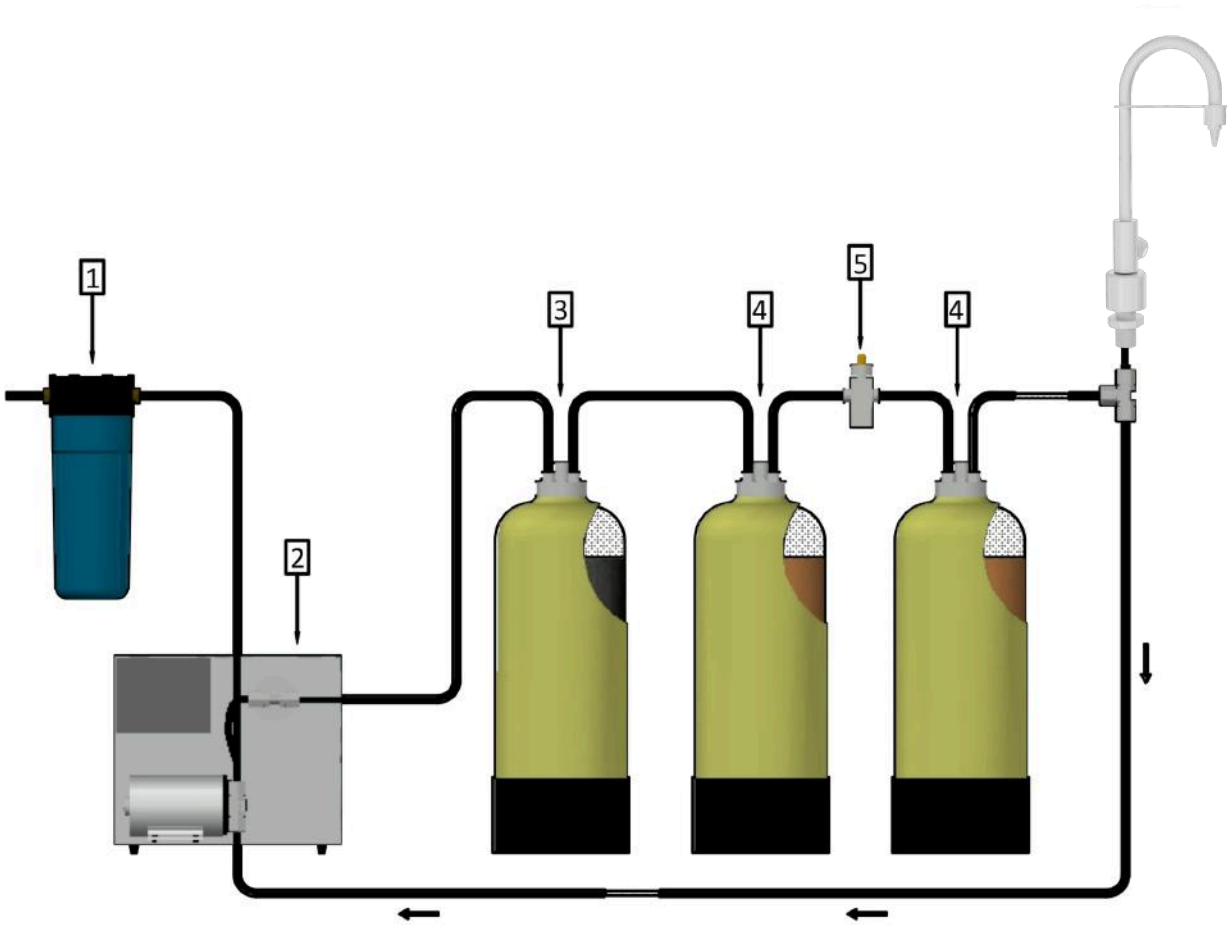

INSTRUMENTS
1 - Filter Housing (*Not required with pretreated water*)
2 - UV Pump
3 - Activated Carbon Adsorber
4 - Primary Mixed-Bed Resin DI
5 - Service Indicator Light